


# Varmatic Lightmaster

## TECHNICAL SPECIFICATION

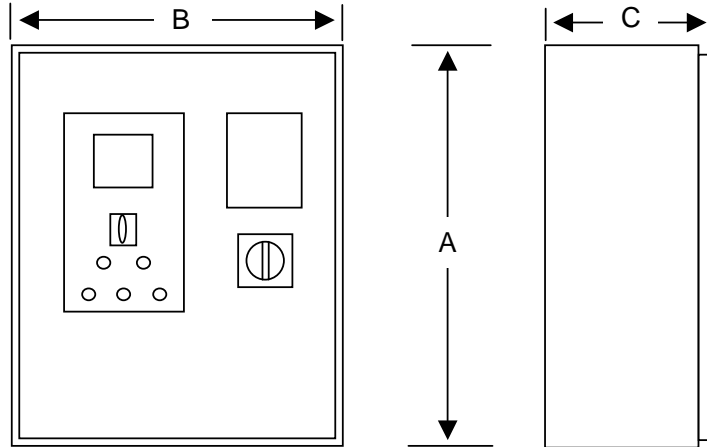

SINGLE-PHASE 240V SPN				
PART No.	DIM A (mm)	DIM B (mm)	DIM C (mm)	WEIGHT (KGS)
LM005/1	600	400	250	23
LM010/1	600	600	300	37
LM015/1	600	600	300	45
LM020/1	600	600	300	52
LM030/1	1000	800	400	67
LM040/1	1000	800	400	99
LM050/1	1000	800	400	122

THREE-PHASE 415V TPN				
PART No.	DIM A (mm)	DIM B (mm)	DIM C (mm)	WEIGHT (KGS)
LM010/3	600	600	300	50
LM015/3	600	600	300	70
LM020/3	800	600	300	85
LM030/3	800	600	300	100
LM045/3	1000	600	400	150
LM060/3	1000	600	400	185
LM075/3	1000	800	400	235
LM100/3	1200	800	400	255
LM150/3	1800	600	600	330

**PROTECTION** (use MCB type 3 or HRC fuses - preferably)



# Varmatic Lightmaster

## TECHNICAL SPECIFICATION

SINGLE PHASE		
PART No.	KVA RATING	PROTECTION REQUIRED
LM005/1	5	1 x 32A
LM010/1	10	1 x 63A
LM015/1	15	1 x 80A
LM020/1	20	1 x 125A
LM030/1	30	1 x 200A
LM040/1	40	1 x 250A
LM050/1	50	1 x 315A

THREE PHASE		
PART No.	KVA RATING	PROTECTION REQUIRED
LM010/3	10	3 x 20A
LM015/3	15	3 x 32A
LM020/3	20	3 x 40A
LM030/3	30	3 x 63A
LM045/3	45	3 x 80A
LM060/3	60	3 x 125A
LM075/3	75	3 x 160A
LM100/3	100	3 x 200A
LM150/3	150	3 x 315A



This document is the property of SDC Industries Ltd.  
Unauthorised reproduction of the content of this document is not permitted.