



Varpac




A new range of high integrity power capacitors in metal enclosures, complete with a suitably rated circuit breaker, designed to meet the need of smaller electrical installations.

Self-healing non-toxic capacitors suitable for use on a 415V, 3 phase, 50Hz system.

Capacitors designed and tested to IEC831, IEC70/70A, circuit breakers to IEC157, BS4752.

4-130 kVAr ratings in lockable enclosures, also available for operation at 400, 415, 440, 550 and 660V.



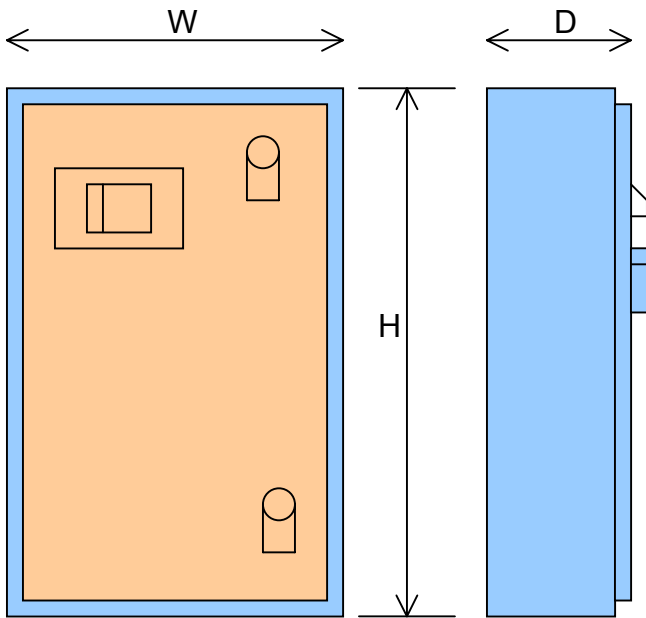

STANDARDS

Capacitors - IEC 831, IEC 70/70A

Circuit breakers - IEC 157, BS4652.

VOLTAGE

400, 415, 440, 550 and 600V, single and 3 phase, 50Hz or 60Hz.

TEMPERATURE

0°C to +40°C

SAFETY FEATURES

- Self-healing, polypropylene dielectric capacitors.
- Two part electrical and mechanical protection for capacitor elements under fault conditions.
- Internal discharge resistors fitted on capacitors.
- Fast acting circuit breaker protecting capacitor bank.
- Heat resisting flexible cable.
- Lockable front door, access only to authorised personnel.

OPTIONS

- No-volt release mechanism can be fitted to circuit breaker.
- Indicator lamp to show capacitor energised.
- Paint finish and cubicle size available to individual customer specifications.

NATIONWIDE SERVICE

Detailed recommendations after 'on site' survey.

After sales back-up and service.

PCB collection and legal disposal.

Rating KVAR	Enclosure Size			Weight kgs
	H	W	D	
8.5	400	300	200	14
12.5	400	300	200	15
16	600	400	200	16
25	600	400	200	19
32	600	400	200	22
37	600	400	200	24
43	600	400	200	26
50	600	400	200	29
65	600	600	250	40
86	1000	600	400	65
100	1000	600	400	70
130	1000	600	400	80



This document is the property of
SDC Industries Ltd.

Unauthorised reproduction of the content
of this document is not permitted.