



11kV Distribution Equipment



TRANSFORMERS


Distribution transformers from stock.
Standard E.S.I. Outdoor oil cooled
11000V/433V DY11 transformers.
Designed and tested to BS Ratings
500 KVA, 1000 KVA and 1500 KVA.
Other sizes and voltages available.

SWITCHGEAR

11000V fused oil switches, oil
circuit breakers, SF6 circuit
breakers, ring main units.

Equipment available for other
voltages, 3.3KV and 6.6KV.



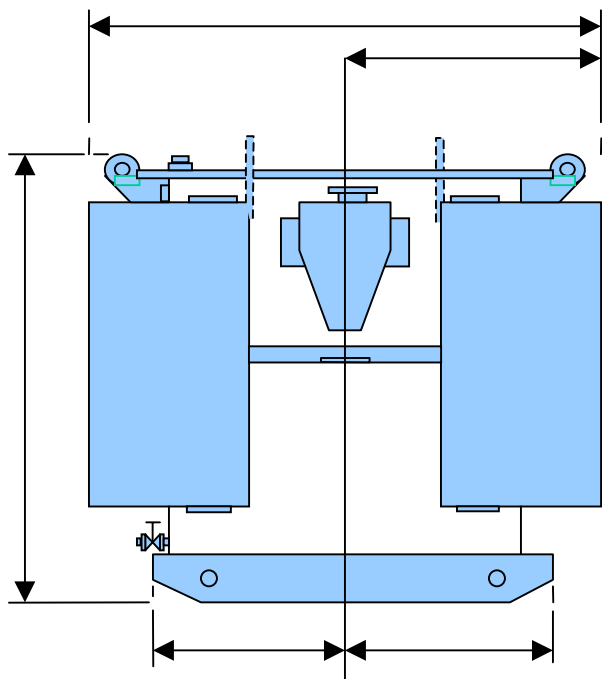

SWITCHGEAR

Type

Fused oil switches 11000V, suitable for transformer protection, from stock.

SF6 available to order.

Ring Main Unit, oil fused units from stock.

Circuit breakers, oil type or SF6 available.

VOLTAGE

11000V, 6600V, 3300V.

STANDARD

BS293, BS5463, ESI 41-2.

TRANSFORMERS

New standard distribution transformers, 11000V/433V DYN11, oil immersed transformers suitable for indoor/outdoor operation, from stock.

Cast Resin or Air Cooled available to order.

VOLTAGE

11000V/433, 6600V/433, 3300V/433, other voltages to order.

STANDARD

ESI Standard 35-1, BS171, IEC76.

AVAILABILITY

500KVA. 1000KVA, 1500KVA (11000V/433V) Ex-stock.

OPTIONS

Silica Gel Breather, Conservator, Oil temperature Gauge.

AVAILABILITY

200 Amp oil fused switches, new from stock.

200 Amp Ring Main Unit, new from stock.

Circuit Breakers, new to order, pre-owned from stock.

NATIONWIDE SERVICE

24 hour delivery of stock items nation-wide.

'On site' erection, testing and commissioning of all equipment.

11KV cable termination service.

11KV pressure testing.

Oil sample testing.

ITEM	KVA	DIMENSIONS mm											MASSES Tonnes			
		A	B	C	D	E	F	G	H	J	K	L	C&C	Fluid	Total	
001	200															
002	315															
003	500	1700	1220	1630	840	650	565	255	1320	1320	378	440	0.980	0.450	2.020	
004	800	1720	1275	1600	860	637.5	580	247.5	1320	1320	385	572	1.250	0.570	2.620	
005	1000	1720	1420	1650	860	710	620	270	1320	1320	394	571	1.580	0.618	3.110	
006	1250	1760	1650	1730	880	800	640	275	1410	1410	402	440	1.900	0.745	3.850	
007	1500	1800	1610	1820	900	770	680	290	1492	1492	499	506	2.185	0.851	4.250	

